

# WALL COVERING

# MURAVYL

HIGH PERFORMANCE  
FLEXIBLE  
WALL COVERING




## PERFORMANCE, FEATURES & BENEFITS

2 m width, Excellent fire resistance,  
Dimensionally stable, Anti-bacterial, Antistatic

## RECOMMENDED USAGE

Education | Healthcare | Retail | Hospitality  
Offices

## CONSTRUCTION

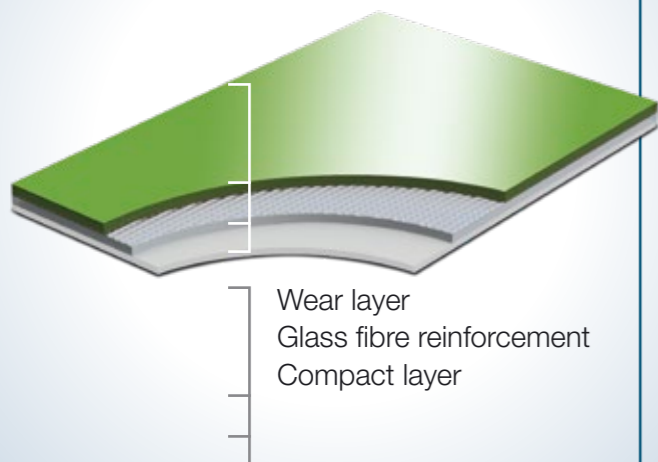

### DESCRIPTION

Construction		compact heterogeneous
Total thickness	EN ISO 24346	1,5 mm
Wear layer thickness	EN ISO 24340	0,5 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	25 lm
Total weight	EN ISO 23997	1,4 kg/m <sup>2</sup>

### CLASSIFICATION

Product specification	EN 649	✓
Residual indentation	EN 433	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Light fastness	EN ISO 105-B02	grade 6

### PERFORMANCE

Abrasion group	MSZ EN 660-1	T
Fire resistance	EN 13501-1	class: B-s2, d0
Chemical resistance	EN ISO 26987	✓
Anti bacterial and fungicid treatment		graboSAN
Seaming method	EN ISO846:1999	heat or cold weld